

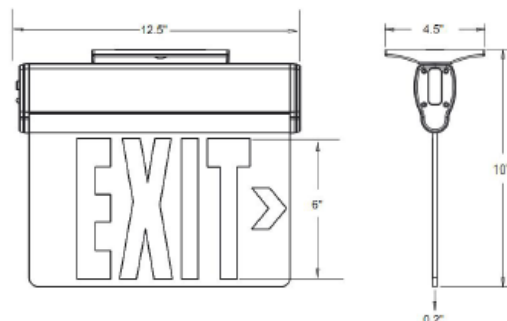


TECHNICAL DATA

SUPPLY VOLTAGE :	230 VAC 50 / 60 Hz	SIGN DIMENSIONS :	125 x 100 x 45 mm
AMBIENT TEMPERATURE (ta) :	0 °C ... +40 °C	VIEWING DISTANCE :	30 m
RATED DURATION :	3 h	PROTECTION CLASS :	IP 20
BATTERY CHARGING TIME :	24 h	INSULATION CLASS :	I
BATTERY TYPE :	3,6 V Ni-Cd		
WATTAGE :	1 W		

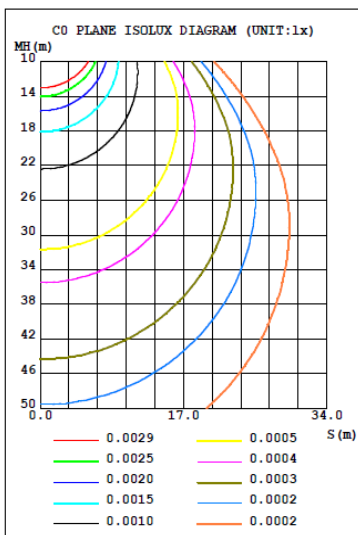

- Single Or Double Sided
- Injection-molded thermoplastic ABS housing
- SMD LED application
- High-temperature Ni-Gd battery cells
- Overcharge and deep discharge protection
- 3 hours duration in case of emergency Suitable
- for Damp Locations
- GSA C22.2 No. 141-15 performance certified
- UL-94V-0 flame rating, fire-resistant
- UL 924 Listed
- Meets NFPA 101 Life Safety Code, NEC, OSHA
- CSA C22.2 No. 141-15 performance certified
- EN 60598-2-22
- Operating Mode : Maintained
- Wall, End and Ceiling Surface Mounted Viewing
- Distance - 30m
- Packing: 400 x 310 x 330mm
- Master Carton: 10pcs / carton
- Gross Weight: 10kg
- Net Weight: 9.50kg

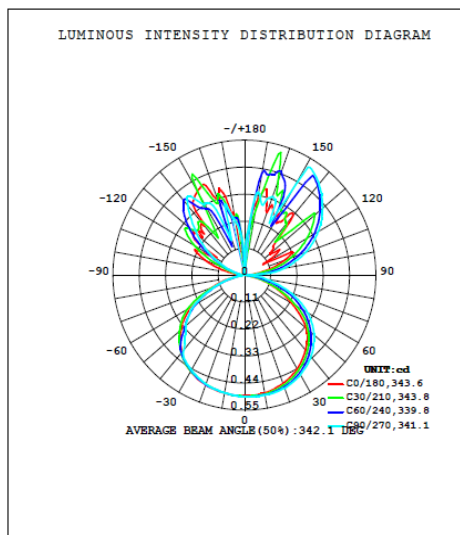

230 VAC 50/60 Hz	IP 20	41 ALU
SMD	-III- Ni - Cd	GW 850°C